



The ultimate in Sauna heaters.

Using Superior Quality Chrome Steel.



Mini X

2,3 kW
3,0 kW
3,6 kW

Mini X is ideal for the smallest of saunas, and is specially made to fit across a corner of the cabin, or against a flat wall, providing maximum bathing space with design flexibility.

Mini X is available in 2,3 kW, 3,0 kW and 3,6 kW.



Mini

2,3 kW
3,0 kW
3,6 kW

Mini heater is the best solution for small saunas. Because of its smaller body and moveable control unit, it needs very little space. Mini is available also with a separate control panel. Mini is more proof of how SAWO continues to bring leading innovation to meet your demand for satisfaction.

Mini is available in 2,3 kW, 3,0 kW and 3,6 kW.



Scandia

3,0 kW
4,5 kW
6,0 kW
6,0 kW PROFESSIONAL
8,0 kW
9,0 kW

Scandia is good for small and medium-sized sauna rooms. Like Mini, it is available either with a built-in control unit or with a separate control panel. It has a robust body and increased stone capacity.

Scandia is available in six outputs: 3,0 kW, 4,5 kW, 6,0 kW, 6,0 Professional, 8,0 kW and 9,0 kW.



Savonia

9,0 kW
Built-In Control

9,0 kW
10,5 kW
12,0 kW

Savonia withstands extreme heat and needs little care and maintenance. It can easily be installed as it has adjustable legs. Savonia heaters are controlled with a separate control panel. 9,0 kW model is available also with a built-in control unit. Savonia can heat around 50 kg of stones.

Savonia model is available in 9,0 kW, 10,5 kW and 12,0 kW.

Super Savonia

15,0 kW
18,0 kW

Super Savonia is designed for big saunas. It is suitable for apartment buildings, hotels, holiday resorts, indoor swimming pools, fitness centers, and other commercial facilities. It has adjustable legs that stand on the floor. It is controlled with a separate control panel. It has a very durable structure and has nine heating elements. With a stone capacity of around 75 kg, Super Savonia generates long-lasting steam.

Super Savonia is available in 15,0 kW and 18,0 kW.

Super Savonia V12

18,0 kW
21,0 kW
24,0 kW

Super Savonia V12 is created for huge sauna rooms. It is recommended for commercial facilities like leisure and fitness centers where saunas are used very often. It has twelve heating elements and a stone capacity of up to 100 kg. It is provided with adjustable legs and it is controlled with a separate control panel.

Super Savonia V12 is available in 18,0 kW, 21,0 kW and 24,0 kW.




Technical Data

	HEATER MODEL	kW	HEATING ELEMENT kW	SAUNA ROOM		SUPPLY VOLTAGE	SIZE OF HEATER			STONES	CONTROL
				MIN	MAX		WIDTH	DEPTH	HEIGHT		
				(m ³)		(mm)					
MINI X	MX-23NB	2,3 kW	2 x 1,15 kW	1,3	2,5	230V 1N~ / 400V 2N~	340	300	495	8-10,5 kg	8 + 4h
	MX-30NB	3,0 kW	1 x 1,15 kW / 1 x 1,8 kW	2	4	230V 1N~ / 400V 2N~	340	300	495	8-10,5 kg	8 + 4h
	MX-36NB	3,6 kW	2 x 1,8 kW	3	6	230V 1N~ / 400V 2N~	340	300	495	8-10,5 kg	8 + 4h
	MX-23NS	2,3 kW	2 x 1,15 kW	1,3	2,5	230V 1N~ / 400V 2N~	340	208	495	8-10,5 kg	separate
	MX-30NS	3,0 kW	1 x 1,15 kW / 1 x 1,8 kW	2	4	230V 1N~ / 400V 2N~	340	208	495	8-10,5 kg	separate
	MX-36NS	3,6 kW	2 x 1,8 kW	3	6	230V 1N~ / 400V 2N~	340	208	495	8-10,5 kg	separate
MINI	MN-23NB	2,3 kW	2 x 1,15 kW	1,3	2,5	230V 1N~ / 400V 2N~	432	208	445	8-10,5 kg	8 + 4h
	MN-30NB	3,0 kW	1 x 1,15 kW / 1 x 1,8 kW	2	4	230V 1N~ / 400V 2N~	432	208	445	8-10,5 kg	8 + 4h
	MN-36NB	3,6 kW	2 x 1,8 kW	3	6	230V 1N~ / 400V 2N~	432	208	445	8-10,5 kg	8 + 4h
	MN-23NS	2,3 kW	2 x 1,15 kW	1,3	2,5	230V 1N~ / 400V 2N~	340	208	445	8-10,5 kg	separate
	MN-30NS	3,0 kW	1 x 1,15 kW / 1 x 1,8 kW	2	4	230V 1N~ / 400V 2N~	340	208	445	8-10,5 kg	separate
	MN-36NS	3,6 kW	2 x 1,8 kW	3	6	230V 1N~ / 400V 2N~	340	208	445	8-10,5 kg	separate
SCANDIA	SCA-30NB	3,0 kW	2 x 1,5 kW	2	4	230V 1N~ / 400V 2N~	513	288	445	18-22 kg	8 + 4h
	SCA-45NB	4,5 kW	3 x 1,5 kW	3	6	400V 3N~	513	288	445	18-22 kg	8 + 4h
	SCA-60NB	6,0 kW	3 x 2,0 kW	5	9	400V 3N~	513	288	445	18-22 kg	8 + 4h
	SCA-60NPB	6,0 kW	3 x 2,0 kW	5	9	400V 3N~	513	288	514	18-22 kg	8 + 4h
	SCA-80NB	8,0 kW	3 x 2,66 kW	7	13	400V 3N~	513	288	514	18-22 kg	8 + 4h
	SCA-90NB	9,0 kW	3 x 3,0 kW	8	14	400V 3N~	513	288	514	18-22 kg	8 + 4h
	SCA-30NS	3,0 kW	2 x 1,5 kW	2	4	230V 1N~ / 400V 2N~	421	288	445	18-22 kg	separate
	SCA-45NS	4,5 kW	3 x 1,5 kW	3	6	400V 3N~	421	288	445	18-22 kg	separate
	SCA-60NS	6,0 kW	3 x 2,0 kW	5	9	400V 3N~	421	288	445	18-22 kg	separate
	SCA-60NPS	6,0 kW	3 x 2,0 kW	5	9	400V 3N~	421	288	514	18-22 kg	separate
	SCA-80NS	8,0 kW	3 x 2,66 kW	7	13	400V 3N~	421	288	514	18-22 kg	separate
	SCA-90NS	9,0 kW	3 x 3,0 kW	8	14	400V 3N~	421	288	514	18-22 kg	separate
SUPER SAVONIA SAVONIA V12	SAV-90NB	9,0 kW	6 x 1,5 kW	8	14	400V 3N~	527	410	650	40-50 kg	8 + 4h
	SAV-90N	9,0 kW	6 x 1,5 kW	8	14	400V 3N~	442	410	650	40-50 kg	separate
	SAV-105N	10,5 kW	3 x 2,0 kW / 3 x 1,5 kW	9	15	400V 3N~	442	410	650	40-50 kg	separate
	SAV-120N	12,0 kW	6 x 2,0 kW	10	18	400V 3N~	442	410	650	40-50 kg	separate
	SAV-150N	15,0 kW	6 x 1,5 kW / 3 x 2,0 kW	13	23	400V 3N~	587	410	650	60-75 kg	separate
	SAV-180N	18,0 kW	9 x 2,0 kW	17	29	400V 3N~	587	410	650	60-75 kg	separate
	SAV-180NV12	18,0 kW	12 x 1,5 kW	18	30	400V 3N~	741	410	650	80-100kg	separate
	SAV-210NV12	21,0 kW	6 x 1,5kW / 6 x 2,0kW	22	35	400V 3N~	741	410	650	80-100kg	separate
	SAV-240NV12	24,0 kW	12x 2,0 kW	26	42	400V 3N~	741	410	650	80-100kg	separate


Subject to change without notice.

Minimum Safety Distances (mm)

MINI X | MINI | SCANDIA

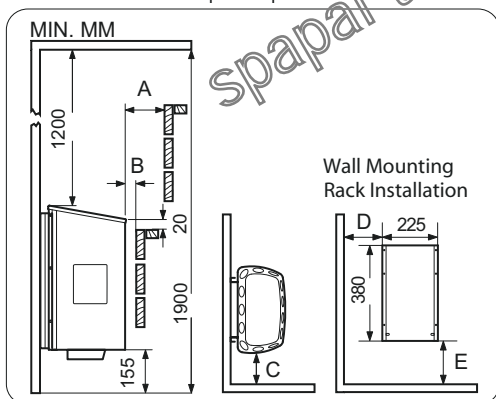


MINI X



	A	B	C	D	E
MX-23NB	30	5	20	60	155
MX-30NB	35	5	25	65	155
MX-36NB	40	5	25	65	155
MX-23NS	30	5	20	60	155
MX-30NS	35	5	25	65	155
MX-36NS	40	5	25	65	155
MN-23NB	100	20	100	140	155
MN-30NB	100	20	100	140	155
MN-36NB	100	20	100	140	155
MN-23NS	60	20	50	90	155
MN-30NS	60	20	50	90	155
MN-36NS	60	20	50	90	155
SCA-30NB	100	20	100	185	155
SCA-45NB	100	20	100	185	155
SCA-60NB	100	20	100	185	155
SCA-60NPB	100	20	100	185	235
SCA-80NB	100	20	100	185	235
SCA-90NB	100	20	100	185	235
SCA-30NS	60	20	50	135	155
SCA-45NS	60	20	50	135	155
SCA-60NS	60	20	50	135	155
SCA-60NPS	60	20	50	135	235
SCA-80NS	60	20	50	135	235
SCA-90NS	60	20	50	135	235

SAVONIA | SUPER SAVONIA | SUPER SAVONIA V12

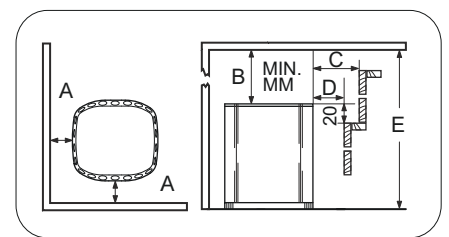

	A	B	C	D	E
SAV-90NB	120	1200	120	60	1900
SAV-90N	120	1200	120	60	1900
SAV-105N	120	1200	120	60	1900
SAV-120N	130	1400	130	70	2100
SAV-150N	160	1400	160	100	2100
SAV-180N	160	1400	160	100	2100
SAV-180NV12	160	1400	160	100	2100
SAV-210NV12	160	1400	160	100	2100
SAV-240NV12	160	1400	160	100	2100

Heater guard distance from the heater

