


## onga Jetset Upgrade replacement instructions

1. Locate the locking catch and flick inwards with a screwdriver and pull the jet barrel from the body



2. Unscrew the threaded wall fitting anti-clockwise from inside the spa bath using pliers positioned where the red dots are shown, or a handmade tool (no commercial jet tool exists) such as a flat bar (cut grooves where the blue marks are shown)

Take care not to put too much pressure towards the spa bath as the body may separate from the back of the spa shell. For this reason, do one jet at a time.

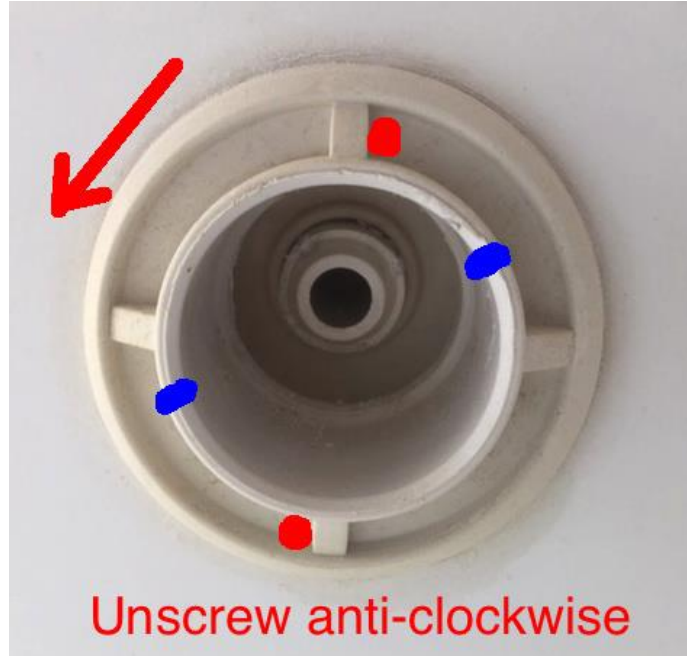

3. If the body separates, squeeze silicon sealant into the gap between body and spa shell.
4. Add silicon to the underside of the lip on the new threaded wall fitting and thread into the body as tight as possible by hand. Use a tool to tighten an extra 1/8<sup>th</sup> of a turn. Clean away excess silicon immediately. Allow to cure.
5. Push new jet barrel into the body until it clicks in place. You may need to rotate 180 degrees to push it in.